

**PANEL EXPANSION NOTE**

**FOR STEEL PANELS < 40' WITH A 1 1/2" TURN DOWN AND 1 1/2" HEM CLEARANCE:**

1. 1/4" FOR INSTALLATION TEMPERATURE BELOW 30 DEGREES FARENHEIT
2. 1/2" FOR INSTALLATION TEMPERATURE ABOVE 30 DEGREES FARENHEIT..

**FOR STEEL PANELS > 40' WITH A 2" TURN DOWN AND 2" HEM CLEARANCE:**

1. 1/4" FOR INSTALLATION TEMPERATURE BELOW 30 DEGREES FARENHEIT.
2. 1/2" FOR INSTALLATION TEMPERATURE ABOVE 30 DEGREES FARENHEIT.

**FOR ALUMINUM PANELS - CONTACT DMI**

**GUTTER NOTES**


LAP GUTTER 3" MIN W/ 2 ROWS OF APPROVED SEALANT AND POP RIVET JOINT 2" O.C. SET IN AND CAP POP RIVETS IN APPROVED SEALANT.  
EXPANSION JOINT REQUIRED FOR EVERY 50'-0" OF GUTTER (REFER TO MISCELLANEOUS DETAILS)

**FLASHING LAP NOTE**

LAP FLASHINGS 2" MIN W/ 1 ROW OF BUTYL SEALANT.

**ICE AND WATER UNDERLAYMENT NOTE**

FULL ICE AND WATER UNDERLAYMENT REQUIRED. STRIP IN DRIP EDGE WITH 6" OF APPROVED ICE AND WATER UNDERLAYMENT.

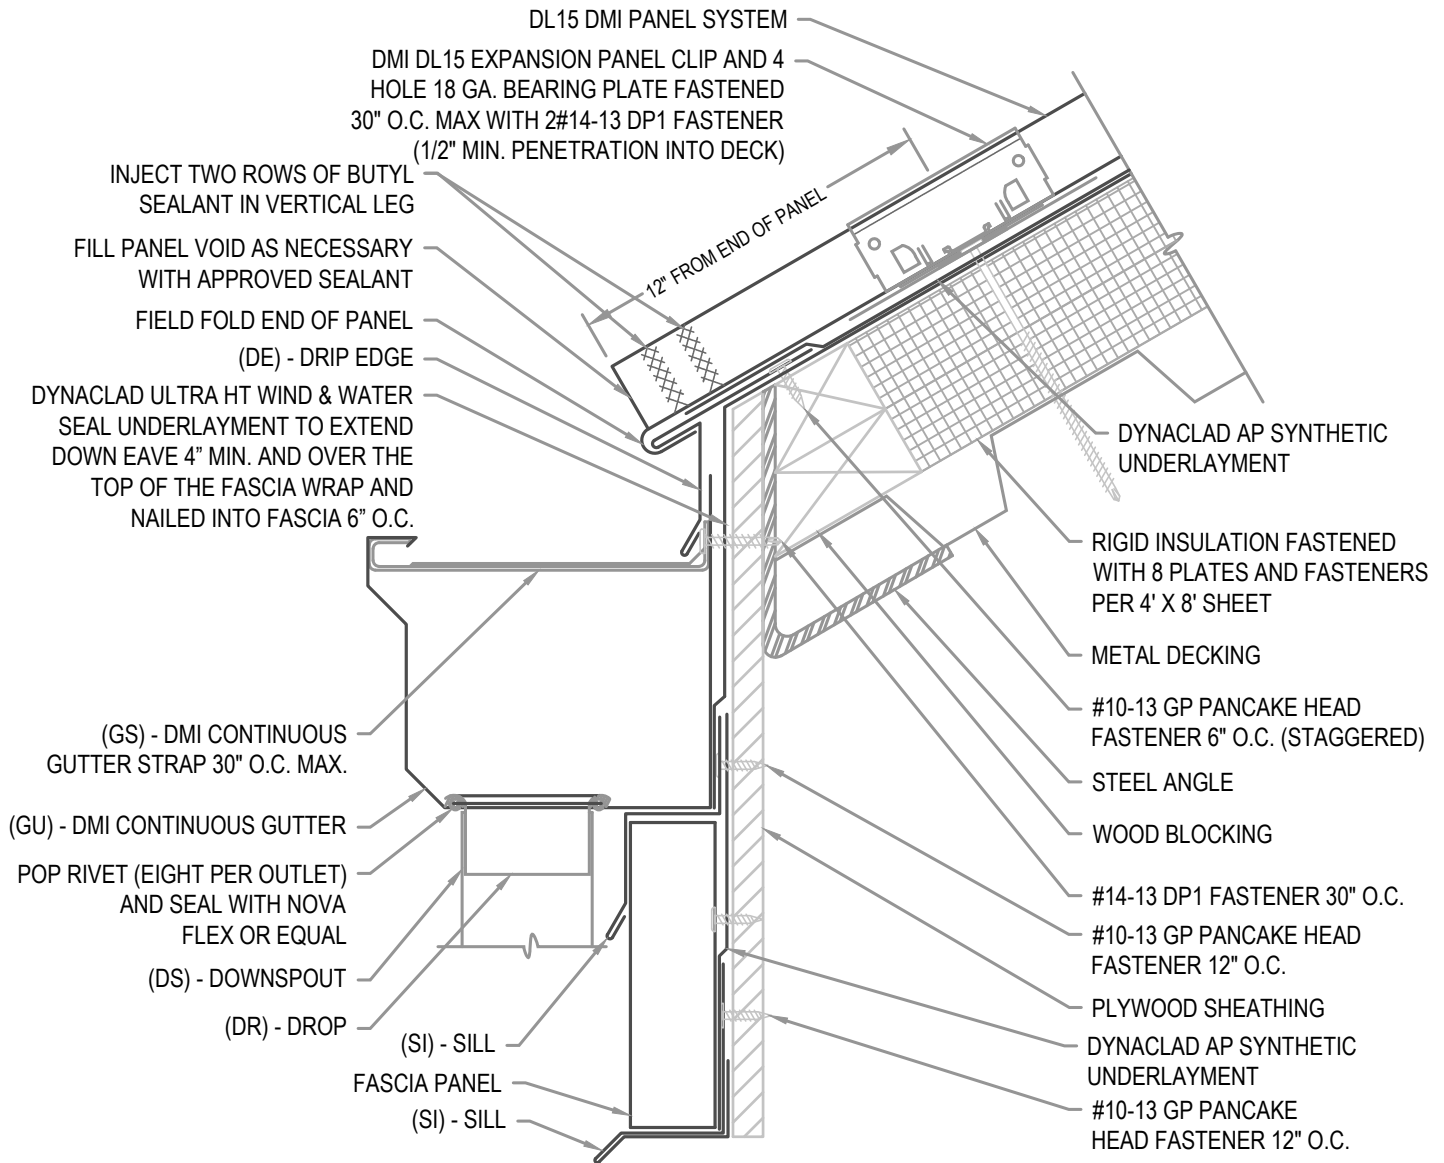

**ARCHITECTURAL EAVE W/ GUTTER**

**• PROVEN • DEPENDABLE • SUSTAINABLE •**

**METAL ENVELOPE SYSTEMS SINCE 1988**

[WWW.DMIMETALS.COM](http://WWW.DMIMETALS.COM)

Detail:  
**DL15 01-02-IA**

Issue/Rev Date: **01/17** Scale: **3"=1'-0"**