


DynaClad® Water Control

BOX GUTTER

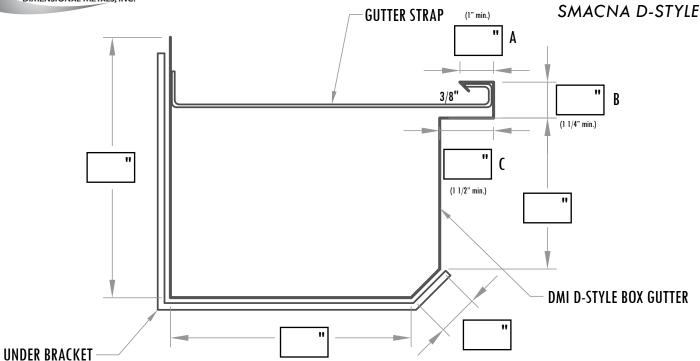

NOTES

All dimensions are to be approved by DMI

Fasteners (not shown): 1 per Gutter Strap and 2 per Gutter Under Bracket

Dimension "A" must be ½" less than Dimension "C" & Dimension B must be 1/4" less than Dimension "C"

| | 3" roof flange to r | aatch slope needed | | |
|--------------|---------------------|---|--|--|
| QUANTITI | ES | ACCESSORIES | | HDG-90: 20_ga Stainless Steel: Copper: RHEINZINK®: FINISH TS DynaClad® PVDF: DynaClad® PVDF w/ Clear Coat*: Acrylic Coated Galvalume® (ACRYLUME®) |
| Quantity | Length | Gutter Strap Gutter Unde End Caps - L End Caps - R Expansion Jo Splice Plates 90° Outside 90° Inside C Special Corn | r Brackets eft ight bints Corners corners | |
| | | FLANGE OPTI | ONS | Clear Anodized Aluminum |
| | | No Roof Flange 3" Roof Flange - Sl | lope: | Custom Color: *Premium Colors subject to minimum quantities, extended lead times and upcharges. Consult DMI for details. |
| PROJECT NAME | | P.O. NO. | CUSTOMER APPROVAL Material is to be fabricated to dimensions as listed on this form. Responsibility of measurement accuracy and completeness is by the submitter. You are agreeing to DMI's Terms and Conditions of | |
| CUSTOMER | | | Sale as outlined on http://www.dmimetals.com/termsandconditions. APPROVED FOR FABRICATION APPROVED AS NOTED | |
| PROVEN | I. DEPENDA | ABLE. SUSTAINABLE. | AUTHORIZED CUSTOMER SIGNATURE DATE | |
| | www.dmi | metals.com | PRINT NAME | PHONE |