

**FLASHING LAP NOTE**

LAP RAKE EDGE AND FASCIA 2" MINIMUM WITH 1 ROW OF BUTYL SEALANT.

FULL COVERAGE OF DYNACLAD ULTRA HT WIND & WATER SEAL UNDERLAYMENT TO EXTEND DOWN RAKE EDGE 4" MIN. AND OVER THE TOP OF THE FASCIA WRAP AND NAILED INTO FASCIA 6" O.C.

#10-13 GP PANCAKE HEAD FASTENER 12" O.C.

1/4" WOOD FILLER

DL20 DMI PANEL SYSTEM

PLYWOOD SHEATHING (MIN. 5/8" THICK)


FIELD FOLD SIDE OF PANEL

(RA) - RAKE EDGE

#10-13 GP PANCAKE HEAD FASTENER 12" O.C.

(FW) - FASCIA WRAP

WOOD BLOCKING

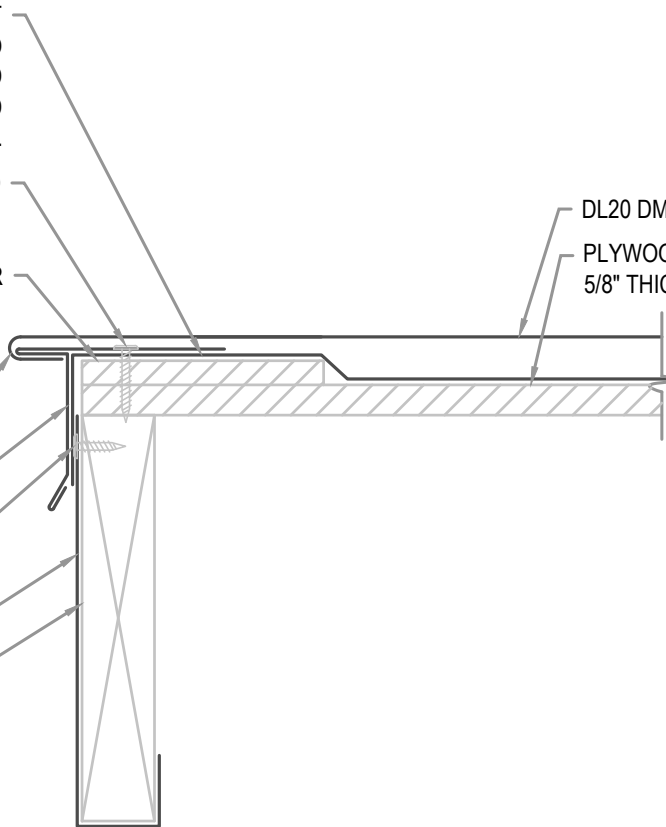

**HYDROSTATIC RAKE EDGE**

• **PROVEN** • **DEPENDABLE** • **SUSTAINABLE** •  
**METAL ENVELOPE SYSTEMS SINCE 1988**

WWW.DMIMETALS.COM

Detail:

**DL20 04-00-WH**

Issue/Rev Date:

**01/17**

Scale:

**3"=1'-0"**