

**NOTE**

REGLET FLASHING TO BE INSTALLED BELOW ALL WEEP HOLES.  
SURFACED MOUNT COUNTERFLASHINGS NOT ACCEPTABLE.

**FLASHING LAP NOTE**


LAP APRON AND REGLET 2" MINIMUM WITH 2 ROWS OF BUTYL SEALANT.

**FASTENER NOTE**

ALL EXTERIOR FASTENERS ARE TO BE EITHER STAINLESS OR PLATED CARBON STEEL.

**VENTILATION NOTE**

DMI PERFORATED Z CLOSURE PROVIDES 23% NET FREE AIR MOVEMENT.  
HIP CONDITIONS CAN NOT BE VENTED.

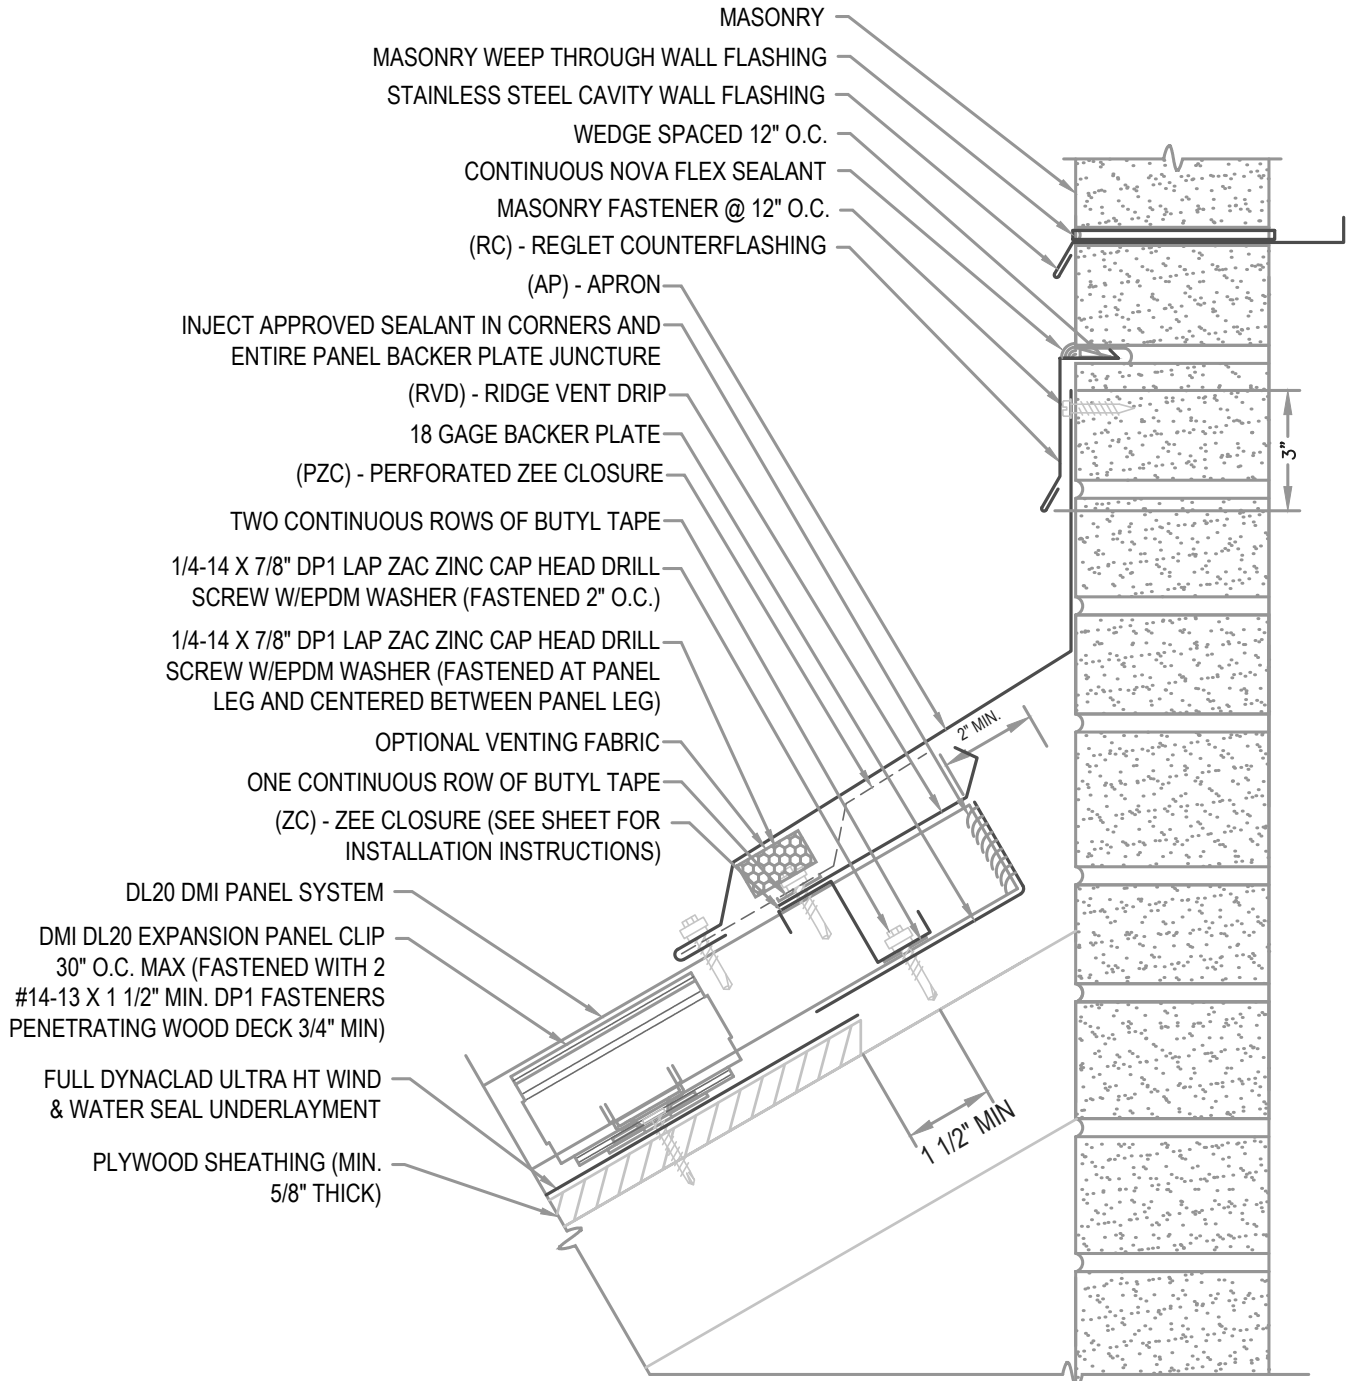

**HYDROSTATIC VENTED APRON**

**• PROVEN • DEPENDABLE • SUSTAINABLE •**  
**METAL ENVELOPE SYSTEMS SINCE 1988**

[WWW.DMIMETALS.COM](http://WWW.DMIMETALS.COM)

Detail:

**DL20 06-03-WH**

Issue/Rev Date:

**01/17**

Scale:

**3"=1'-0"**