
MAXIMUM PANEL ATTACHMENT FASTENER SPACING IS 24" O.C. ALL FASTENERS TO PENETRATE WOOD 3/4" MIN. AND METAL FRAMING 1/2" MIN.

SEE DMI DYNACLAD EDGE INSTALLATION GUIDE FOR COMPLETE FASTENING AND **INSTALLATION INFORMATION FOR ES-1** RATED SNAP-ON COPING



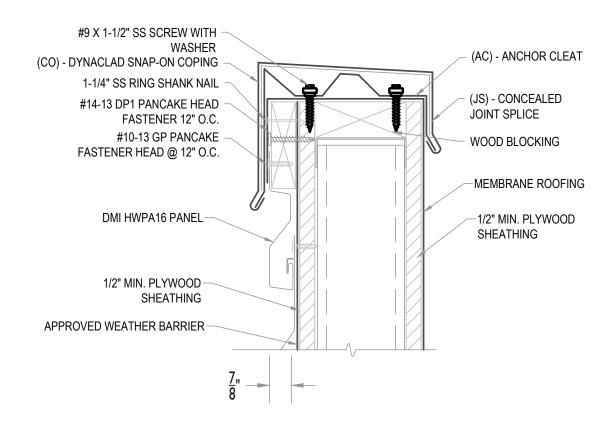

COPING WITH WOOD SUBSTRATE

•PROVEN • DEPENDABLE • SUSTAINABLE •

HWPA16-H-04-00

**METAL ENVELOPE SYSTEMS SINCE 1988** 

WWW.DMIMETALS.COM

Issue/Rev Date:

04/19

3"=1'-0"