

Metal Roof Sealant




Adheres To

- Wood
- Flashing
- Trim
- Metal Siding
- Metal Roof
- PVC
- Steel
- Gutters
- Aluminum
- Masonry
- Downspouts
- Roof Tile
- Copper*

Product Advantages

- Adheres to Kynar® coated metals**
- Excellent adhesion and flexibility
- VOC Compliant
- Mildew Resistant
- Extrudes down to -20°F
- Freeze thaw stable
- Service Temperature -40° F to +400° F
- Invisible to UV light
- Tack free in 10 minutes
- Completely cured in up to 2 days

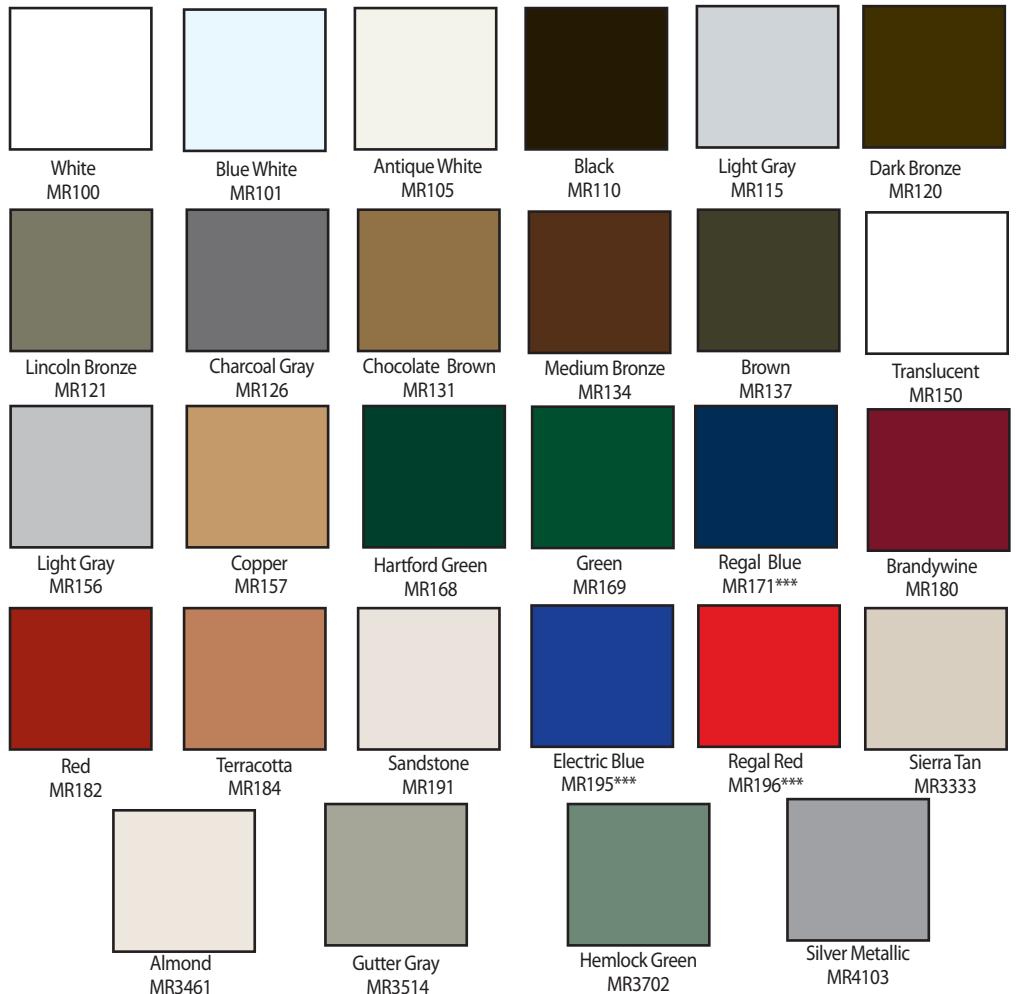

Product Information

- Description - Metal Roof Sealant
- Item Number - 02-MR0XXX0-10C1
- Size - 10.3 FL. OZ (304 mL)
- Unit Dimensions - 9" x 2" x 2"

Case Pack Information

- Description - Metal Roof Sealant
- Item Number - 02-MR0XXX0-10C1
- Dimensions - 11 15/16" x 9 15/16" x 8 1/8"
- Case Weight 10 lbs. / Cases Per Pallet -120

*In exposed areas only

**Kynar is a registered trademark of Arkema Inc

***Bright Color Pricing

Metal Roof Sealant

Technical Information

Product: Novaflex
Metal Roof Sealant

Appearance: Smooth paste

Service Temperature:
-40°F to +400°F

Adhesion: Excellent to most
common building materials

Consistency: Non-sag

Gunning Extrusion: Easy to gun

Flexibility: Good

Water Resistance: Good
– Not to be submerged

Exterior Weathering: Excellent

Aging: Excellent

Freeze-Thaw Stable:

Odor: None

Skin Time:
• 40°F/40% relative
humidity – 40 minutes
• 75°F/50% relative
humidity – 10 minutes
• 95°F/95% relative
humidity – 5 minutes

Through Time:
• 40°F/60% relative
humidity – 2-3 days
• 75°F/50% relative
humidity – < 24 hrs

Weight per gallon: 10.2 pounds

Solids: 97%

Novaflex[®] Metal Roof Sealant provides unbeatable adhesion to metal, coated metals, wood, masonry, PVC and most common construction materials.

Product Specs

Coverage: 1/4" bead application - 28 linear feet

Specifications: Meets or exceeds ASTM C-920, TT-S-001543A and TT-S-230C

Shelf life: Use product within 18 months from manufacturer's date. FREEZE THAW STABLE.

User Tips: Not designed for continuous submersion or use below the water-line.

Recommended For Sealing & Bonding Around

- Wood
- Metal Siding
- Steel
- Flashing
- Metal Roof
- Trim
- Gutters
- PVC
- Aluminum
- Masonry
- Downspouts

Clean Up: Clean tools with toluene or mineral spirits before it dries. After setting, excess sealant must be cut or scraped away. Follow solvents vendor's precautions.

Not Recommended For

- Surface temperature below 0°F or exceeding 120°F during installation
- Surfaces continuously immersed in water
- Building materials that bleed oils, plasticizers or solvents that may affect adhesion
- Frost-laden or wet surfaces
- Completely confined joints or if the sealant is intended to be painted

Limited Warranty: Satisfaction guaranteed when handled and applied according to label instructions. Call 1-800-380-0138 for Customer Service.

CAUTION!: Avoid contact with eyes and skin. Wash hands after using.

KEEP OUT OF REACH OF CHILDREN

First Aid: In case of eye contact, flush thoroughly with large amounts of water. Get medical attention if irritation persists. If swallowed, call Poison Control Center, hospital emergency room, or physician immediately.

WARNING: Eye and skin irritant! Do not swallow. Do not allow eye contact or prolonged skin contact.

SEEK IMMEDIATE MEDICAL ATTENTION. Additional information please refer to MSDS.

Disposal: For disposal of material follow federal, state and local regulations.

NOVAGARD
Solutions.
Engineered Products... Innovative Thinking

5109 Hamilton Ave.
Cleveland, OH 44114
1-800-380-0138
www.novagardsolutions.com
Made in USA. For commercial use.

