
## NOTE

REGLET FLASHING TO BE INSTALLED BELOW ALL WEEP HOLES. SURFACED MOUNT COUNTERFLASHINGS NOT ACCEPTABLE..

## **FLASHING LAP NOTE**

LAP APRON AND REGLET 2" MINIMUM WITH 2 ROWS OF BUTYL SEALANT.



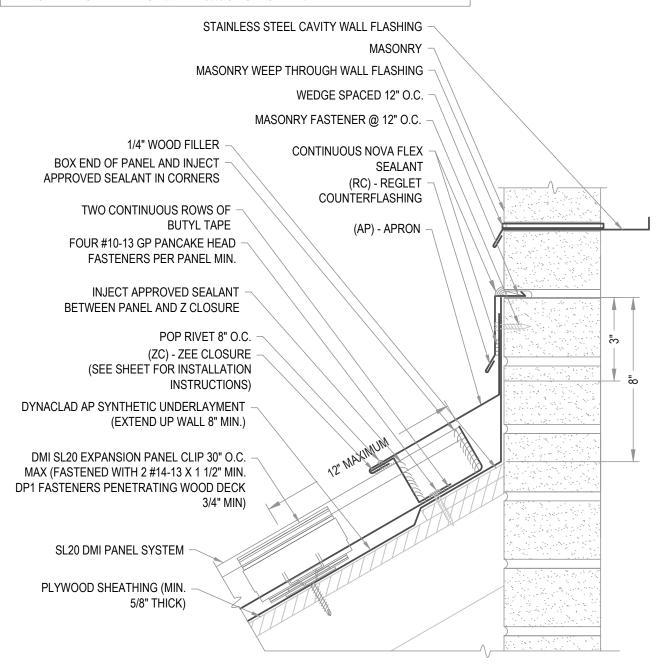

## ARCHITECTURAL APRON

Detail: SL20 06-01-W

• PROVEN • DEPENDABLE • SUSTAINABLE • METAL ENVELOPE SYSTEMS SINCE 1988

WWW.DMIMETALS.COM

Issue/Rev Date:

01/17

3"=1'-0"

Scale: