


DynaClad® Edge

SNAP-ON COPING

ANSI/SPRI ES-1 TESTED

www.dmimetals.com

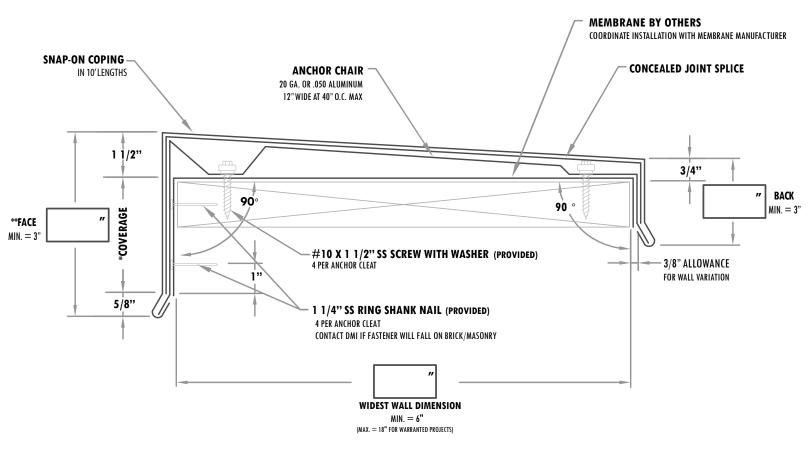

NOTES

Contact DMI for verifcation of test report on your project.

*Coverage as noted above should extend 1" below water resistant surface

QUANTITIES

TOTAL LNFT
OUTSIDE CORNERS
INSIDE CORNERS
SPECIAL CORNERS (ATTACH SKETCH)
END CAP - LEFT
END CAP - RIGHT
END TERM - LEFT
END TERM - RIGHT
OTHER
(ATTACH SKETCH FOR "OTHER")

PROJECT NAME	P.O. NO.
PROJECT LOCATION	
CUSTOMER	

WARRANTY

20 YR LIMITED WARRANTY

COLOR			

CAP MATERIAL

O .050 ALUMINUM	
O .040 ALUMINUM	
O 22 GA. GALVALUME	
O 24 GA. GALVALUME	

FINISH

O PREFINISHED PVDF	
O MILL FINISH	
O OTHER -	

O OTHER -

CUSTOMER APPROVAL

Material is to be fabricated to widest wall dimension. Responsibility of measurement accuracy and completeness is by the submitter. You are agreeing to DMI's Terms and Conditions of Sale as outlined on http://www.dmimetals.com/termsandconditions.

	APPROVED FOR FABRICATION
=	

\cap	APPROVED	AS	NOT	=[

X	
AUTHORIZED CUSTOMER SIGNATURE	DAT

ARCHITECT PRINT NAME PHONE

^{**}Face dimension should equal coverage plus 2 1/8"