




DynaClad® Edge

SPRING-LOK COPING

ANSI/SPRI ES-1 TESTED

www.dmimetals.com

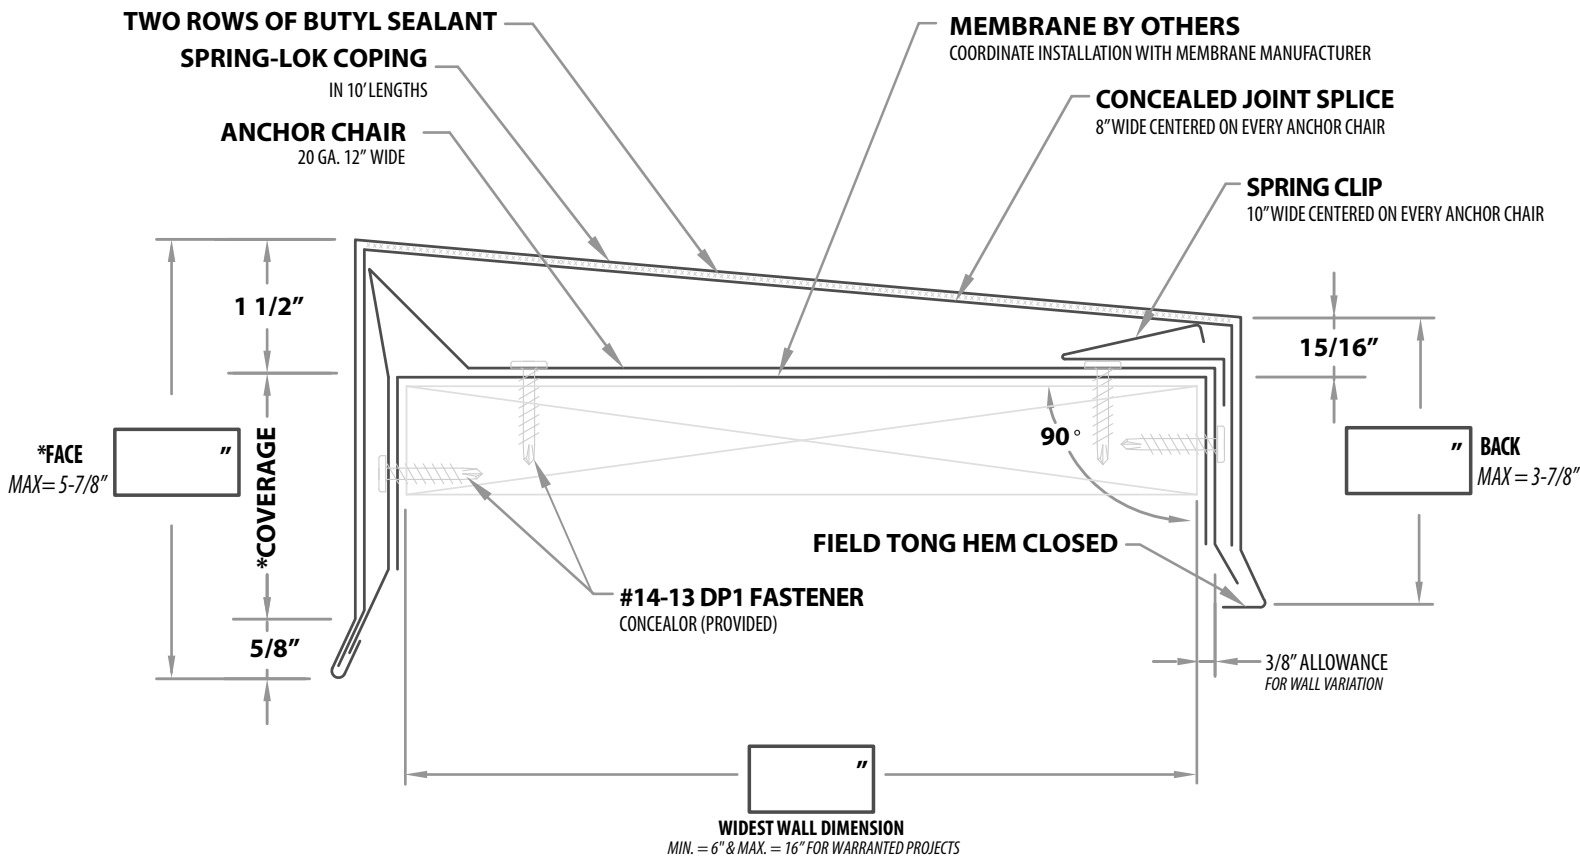

NOTES

Contact DMI for verification of test report on your project.
 *Coverage as noted above should extend 1" below water resistant surface
 **Face dimension should equal coverage plus 2 1/8"

QUANTITIES

- ___ TOTAL LNFT
- ___ OUTSIDE CORNERS
- ___ INSIDE CORNERS
- ___ SPECIAL CORNERS (ATTACH SKETCH)
- ___ END CAP - LEFT
- ___ END CAP - RIGHT
- ___ END TERM - LEFT
- ___ END TERM - RIGHT
- ___ OTHER - _____
 (ATTACH SKETCH FOR "OTHER")

WARRANTY

20 YR, 120 MPH WIND WARRANTY

COLOR - _____

CAP MATERIAL

- .050 ALUMINUM
- .040 ALUMINUM
- 22 GA. GALVALUME
- 24 GA. GALVALUME
- OTHER - _____

FINISH

- PREFINISHED PVDF
- MILL FINISH
- OTHER - _____

CUSTOMER APPROVAL

Material is to be fabricated to widest wall dimension. Responsibility of measurement accuracy and completeness is by the submitter. You are agreeing to DMI's Terms and Conditions of Sale as outlined on <http://www.dmimetals.com/termsandconditions>.

- APPROVED FOR FABRICATION
- APPROVED AS NOTED

X

AUTHORIZED CUSTOMER SIGNATURE

DATE

PRINT NAME

PHONE

PROJECT NAME

P.O. NO.

PROJECT LOCATION

CUSTOMER

ARCHITECT