


**STANDARD  
COLORS**

# NOVAFLEX<sup>SILICONE</sup> PRO

## PREMIUM ADHESIVE SEALANT



NFX150  
Translucent



NFX100  
White



NFX101  
Blue White



NFX104  
Up White



NFX105  
Antique White



NFX143  
Almond Sand



NFX3482  
Sand



NFX3461  
Almond



NFX140  
Beige



NFX191  
Sandstone



NFX115  
Light Gray



NFX111  
Gray



NFX138  
Dark Sand



NFX156  
Silver Limestone



NFX3333  
Sierra Tan



NFX146  
Pebblestone



NFX3514  
Gutter Gray




NFX4103  
Silver Metallic



NFX141  
Tan



NFX118  
Slate Gray



NFX157  
Copper




NFX117  
Gunmetal Gray



NFX134  
Terratone




NFX196  
Regal Red



NFX182  
Roof Red



NFX3801  
Pacific Blue



NFX171  
Regal Blue



NFX197  
Patina Green



NFX3702  
Hemlock Green



NFX169  
Forest Green




NFX168  
Hartford Green



NFX180  
Brandywine



NFX137  
Brown



NFX126  
Charcoal Gray



NFX120  
Dark Bronze



NFX121  
Lincoln Bronze



NFX194  
Exterior Bronze



NFX110  
Black

Impervious to UV

No solvents or odor

All weather -20°F to 160°F

Permanently flexible

Superior adhesion


Rain safe 1 hour

20 year limited warranty

24 month shelf life

Visit [novagard.com/colors](http://novagard.com/colors) to use our online matching tool to cross reference NovaFlex colors to popular manufacturers.

## Made to Order Colors

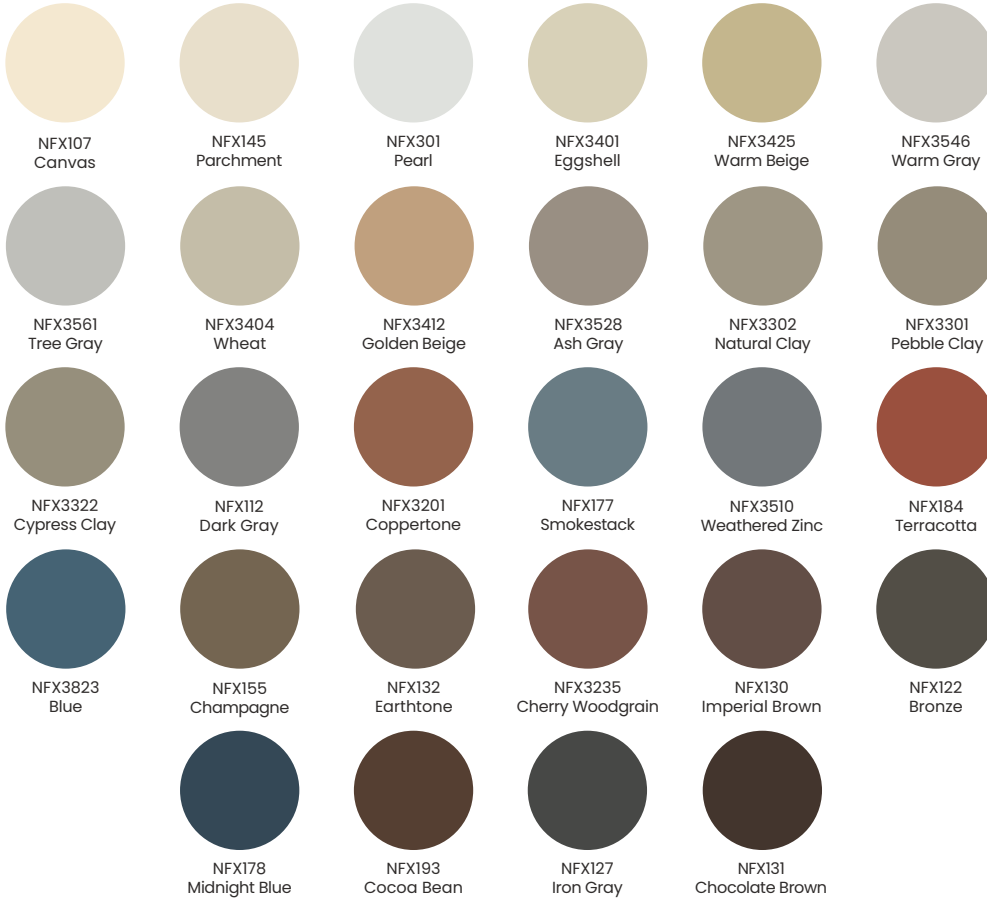

Colors shown for illustrative purposes. Verify product color match before applying.  
Contact your representative for order information and program details.

### PRODUCT SPECIFICATIONS

Physical Property	Test Method	Performance Range Type I - Class 35	Performance Range Type II - Class 50
Appearance		Paste (Translucent, Metallics)	Paste (All Colors)
Viscosity	Brookfield #7 @10 rpm	3,500 - 7,000 poises	4,500 - 8,000 poises
Extrusion Rate	1/8" Orifice @ 50 psi	30 - 80 grams/minute	30 - 80 grams/minute
Skin Over Time	3/8" @ 50% RH & 77°F	5 - 15 minutes	5 - 15 minutes
Shelf Life		24 months - cartridge 18 months - sausage	24 months - cartridge 18 months - sausage

### TYPICAL PROPERTIES\*

Physical Property	Test Method	Typical Value Type I - Class 35	Typical Value Type II - Class 50
Specific Gravity		1.03	1.20 - 1.25
Tensile Strength	ASTM D412	150 psi	200 psi
Elongation	ASTM D412	575%	730%
Tear Resistance	ASTM D624	33 pli	33 pli
Hardness (Shore A)	ASTM D2240	15	25
Tack Free Time	ASTM C679 @ 50% RH & 77°F	15 minutes	20 minutes
Through Cure	3/8" @ 50% RH & 77°F	48 hours (14 days for OEM window applications)	48 hours (14 days for OEM window applications)
Service Temperature		-40°F to 400°F (-40°C to 204°C)	-40°F to 400°F (-40°C to 204°C)
Application Temperature		-20°F to 160°F (-29°C to 71°C)	-20°F to 160°F (-29°C to 71°C)
Joint Sealant Designation	ASTM C920	Type S, Grade NS Class 35 Use NT, M, G, A, O	Type S, Grade NS Class 50 Use NT, M, G, A, O
Adhesion Glass Aluminum Vinyl	ASTM D794	13 pli 12 pli 13 pli	24 pli 24 pli 25 pli

\*The values outlined reflect testing that was conducted under laboratory conditions, actual results may vary. The information provided in the above table is not intended for use in preparing specifications. Please consult manufacturer for additional information.

Proudly made in Cleveland, OH

Effective Date: Jun 2025-v1.8



### Permanently flexible

- Will not shrink or crack
- Waterproof
- Mold/mildew resistant
- Superior UV resistance

### Interior & exterior applications

- 100% neutral cure silicone
- Will not sag or slump
- Completely cured within 48 hours
- Extrudes from -20°F to 160°F
- Adheres to:
  - vinyl
  - fiber cement
  - metals
  - wood
  - masonry
  - PVC / PVDF
  - most common construction materials

### AAMA verified for window installations

### Available in a large selection of major manufacturer colors

- Class 50: All colors
- Class 35: Translucent, metallics

### VOC compliant in all 50 states (Green Building Compliant)

- PFAS free
- Low odor
- Solvent free
- HFC free

### Easily gunned at all temperatures

- Weatherproof plastic cartridges w/removable tips
- Excellent tooling properties
- Will not freeze

### Available in

- 10 oz cartridges
- 20 oz sausages



# NOVAGARD

5109 Hamilton Avenue  
Cleveland, OH 44114 USA  
(216) 881-8111 | (800) 380-0138  
novagard.com

ISO 9001:2015 QMS (with Design)  
IATF 16949:2016 QMS (with Design)